
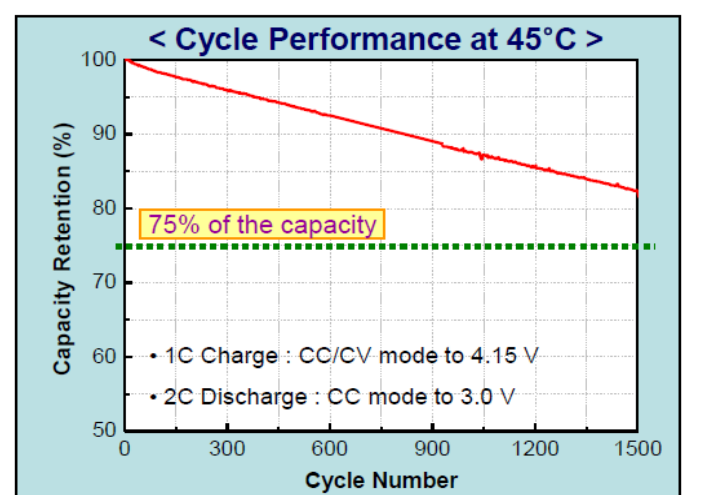
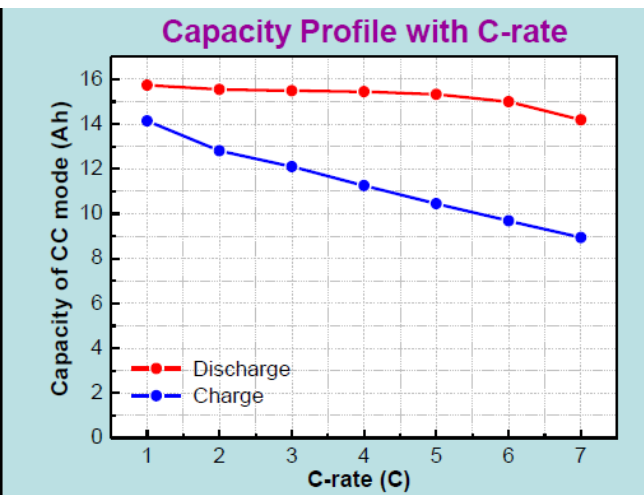
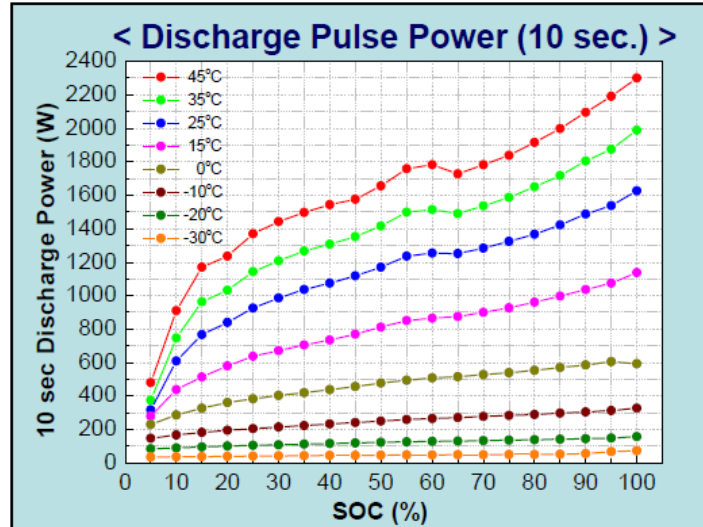
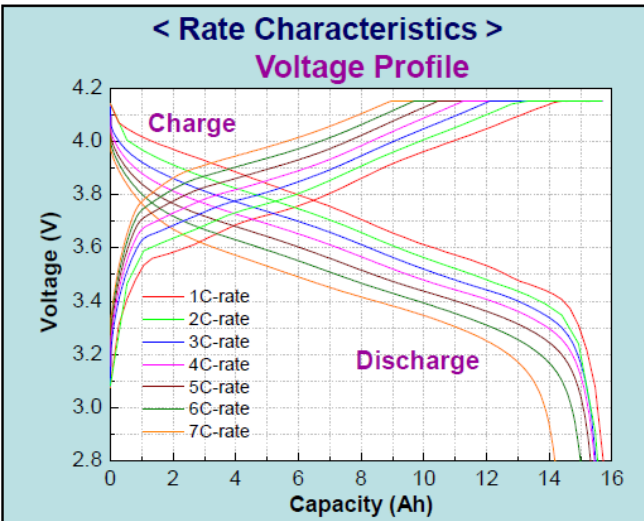


TECHNICAL DATA

(Typical values at 25°C)

Nominal Capacity (at 1C rate, 2.80 ~ 4.15 V)	15.9 ± 2.5%
Nominal Voltage (at 1C rate discharge, 50% SOC)	3.70 V
Energy Density	155 Wh/kg
Power Density (at 50% SOC, 10 sec.)	2,600 W/kg
Voltage Range	2.80 ~ 4.15 V
Temperature Range	-30 ~ 60 °C
Weight	approx. 380 g
Volume	approx. 160 mL

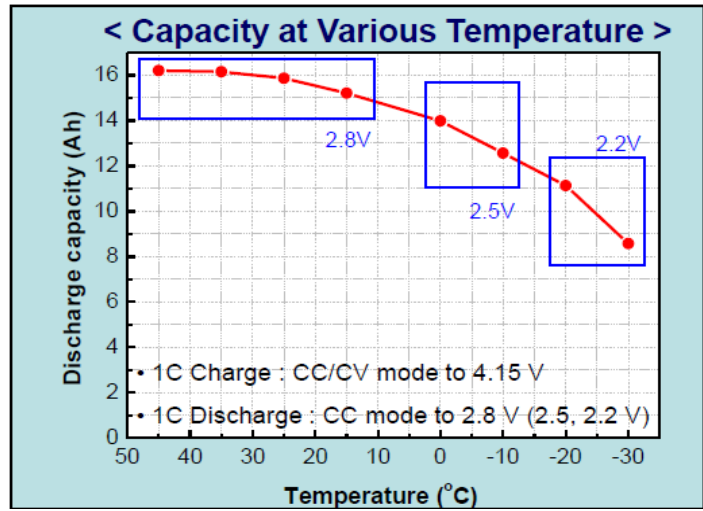

Category	Test Items	Result
Thermal	Thermal Stability	Pass
	Thermal Shock	Pass
Electrical	Overcharge	Pass
	Overdischarge	Pass
	External Short Circuit	Pass
Mechanical	Nail Penetration	Pass
	Crush	Pass
	Vibration	Pass
	Drop	Pass

